





RÖCKA

DESCRIPTION: Steps **TEXTURE:** Natural stone (Fossil stone)

PALLET OVERVIEW - 48"



PALLET OVERVIEW - 60"



NOTES

Röcka 48" is a double-sided step. Each side has slight natural texture differences. Please take that into consideration when installing them side by side. We recommend keeping the same texture together.

Please note that there is a slight vertical angle on the front and back faces of the step $\frac{3}{8}$ ", from the bottom to the top of the step.

To achieve a natural appearance, product dimensions can vary $\pm 3/16$ " (5 mm) for height and $\pm 1/2$ " (13 mm) for length and width.

* For an authentic look, each color option is composed of a variety of darker & lighter tones. Natural ingredients such as granite are present within the recipe to allow for a range in tones, veining and textures from one stone to another.


Specifications per pallet		Imperial	Metric
48" DOUBLE-SIDED	Cubing	8 units	8 units
	Linear coverage per pallet	32 lin. ft	9.76 lin. m
	Approx. Weight	2 770 lbs	1 256 kg
	Number of rows	4	
	Linear coverage per row	8 lin. ft/row	2.44 lin. m/row

D2 L	H D1	A	Unit dimensions		Units/pallet	
			in	mm		
			Height	6	152	8 units
			Depth 1	14 $\frac{7}{8}$	378	
			Depth 2	14 $\frac{1}{8}$	359	
			Length	48	1 219	



Specifications per pallet		Imperial	Metric
60"	Cubing	2 units	2 units
	Linear coverage per pallet	10 lin. ft/pal	3.05 lin. m/pal
	Approx. Weight	1 020 lbs	463 kg
	Number of rows	1	

D2 L	H D1	A	Unit dimensions		Units/pallet	
			in	mm		
			Height	6	152	2 units
			Depth 1	15 $\frac{1}{4}$	387	
			Depth 2	14 $\frac{5}{8}$	371	
			Length	60	1 524	



RÖCKA

WALL & EDGE


When building a staircase, the Röcka wall can be used to complete the sides and act as part of a structural system. See the product specifications on page 185.



INSTALLATION GUIDE

STEPS

RÖCKA

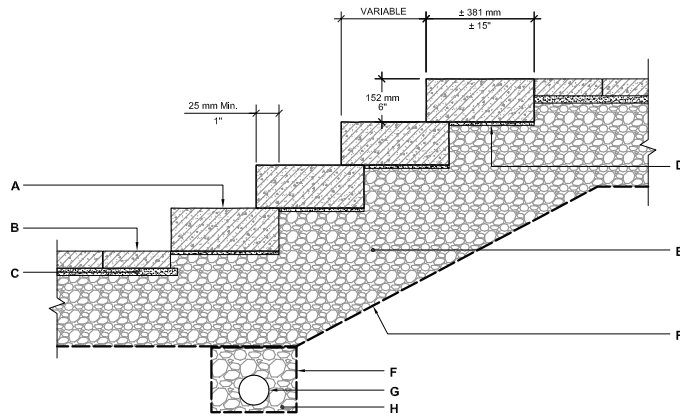

- A. RÖCKA STEP UNIT
- B. TECO-BLOC CONCRETE PAVER
- C. SETTING BED 1" (25 mm) THICK
- D. SETTING BED 3/2" (12 mm) MAX. TO COMPACT (AS REQUIRED FOR ALIGNMENT)
- E. COMPACTED GRANULAR BASE 0-3/4" (0-20 mm) THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS
- F. GEOTEXTILE
- G. PERFORATED DRAIN 4" (100 mm) DIA. CONNECTED TO SERVICES
- H. CLEAN STONE 3/4" (20 mm)